


CONDUCTOR STRINGING EQUIPMENT
Single Conductor Stringing Blocks
6700 Series for Transmission Lines

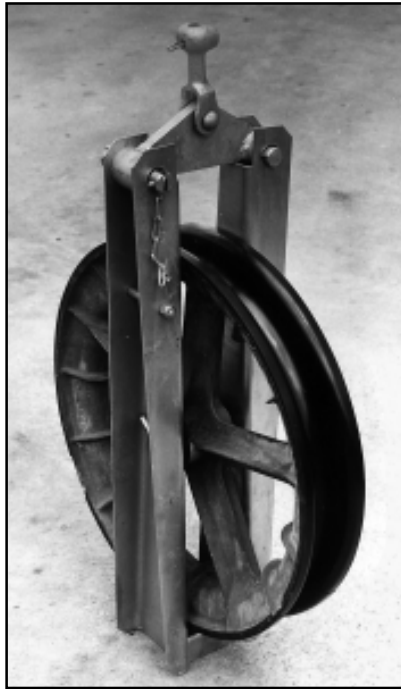

STANDARD FEATURES

Aluminum conductor sheaves with urethane linings and roller bearings
Steel frame
Crosshead and type 'B' socket for suspension
Lightweight construction


OPTIONS

- Conversion Kits to bundle blocks
- 5000 Series Open Frame style with latch

LINED CONDUCTOR SHEAVES:

	6720-1U		6724-1U		6728-1U		6736-1U		6753-1U	
	inches	m m	inches	m m	inches	m m	inches	m m	inches	m m
A	20.00	508	24.88	632	27.63	702	35.63	905	54.13	1375
B	15.88	403	20.88	530	23.88	607	30.13	765	48.50	1232
C	2.06	52	2.00	51	2.00	51	2.75	70	2.81	71
D	0.69	17.5	0.69	17.5	0.69	17.5	1.13	29	0.94	24
E	3.00	76	3.75	95	3.75	95	4.38	111	4.50	114

NOTE: All sheaves are lined with urethane linings.



At TSE, engineering is a process of continuous product improvement; therefore, specifications are subject to change without notice.

09-22-2011

TSE International, Inc.
5301 Shreveport-Blanchard Hwy
Shreveport, Louisiana 71107

www.tse-international.com

Toll Free: 800-825-2402
Telephone: 318-929-2368
FAX: 318-929-4853